




QR Code for Mobile

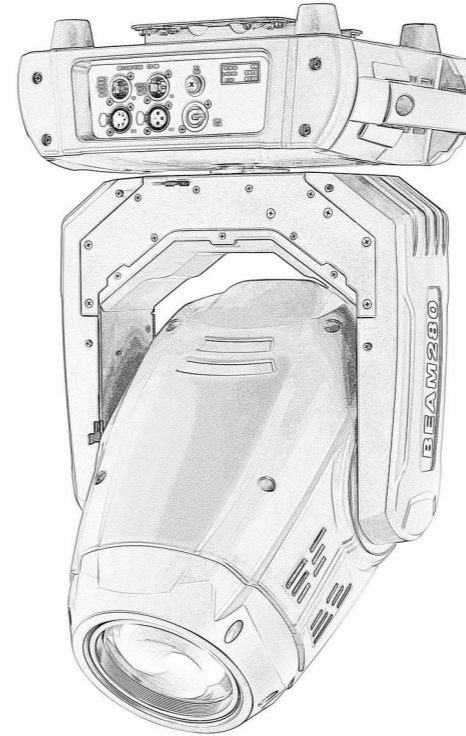

ROYLITE
ROY STAGE LIGHT CO LIMITED

ROY STAGE LIGHT CO LIMITED

Add : No.4 Dayang Road,Tanbu town,Huadu District,GuangZhou City,China

Email : sales@roylite.com

WhatsApp / Tel : +86 137 1912 2593

Web : www.roylite.com



PROFESSIONAL SHOW LIGHTING

ABOUT US

ROY STAGE LIGHT CO LIMITED is a stage lighting equipments manufacturer and distributor, we have been producing stage lights in Guangzhou City,China since 2012,using a combination of quality raw materials, new technology,and a skilled and dedicated work force.

Being a reliable manufacturer in Stage Lighting equipments, we are confident to provide you with everything that' s perfect for you every time.

When your customers want something that's good quality but on a tight budget, our products is ideal. Everything is manufactured to our own high standards but comes with a price for you to compete in your market.

We help for special orders. Every now and then you might need something that isn't already within our product lines,but well always have the ideal solution to get you what you want.

WE GROW BY HELPING OUR CUSTOMERS GROW. We're always on your side - and well do whatever we can to help your business succeed. From our great prices and quality products to great services, we'll give you everything you need to help close the deal.

Sourcing service for relevant products is also available, we are always here for you.

Welcome to visit our factory in Guangzhou city, guangdong province, China !



CCC certificate



CE certificate



ROHS certificate



Patent

PROFESSIONAL SHOW LIGHTING

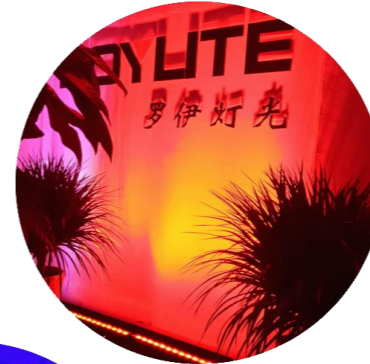


TABLE OF CONTENTS

Beam Spot Moving Head

LED Wash Moving Head

IP20 Static Lights

IP65 Outdoor Lights

LED Studio Lights

18R Beam Spot Wash



Model : R-BSW380

Brand : ROYLITE

Lamp : Osram MSD 371w

Beam angle : 1.5° - 40°

Osram MSD R18 371w bulb, Beam angle 1.5°- 40° zoom, 16 circular prisms and 6 linear prisms. 1 color wheel, 1 rotate gobo wheel, 1 fixed gobo wheel, 24 DMX channels, Beam 10m - 250000 lux

Lamp type: Osram MSD 371w bulb, lifespan 2200 hours Color temp: 8000K

Lens : high precision optical lens

Beam angle: 1.5° - 40° linear zooming

14 color filters + white, color rainbow can be created

1 rotating gobo wheel with 7 gobos + white, with the features of self-rotating, water running and shaking effects. gobo wheel can be positioned

Sharp Beam 500



Model : R-MB500

Brand : ROYLITE

Lamp : Osram MSD 420w

Beam angle : 0 - 2°

Suitable for outdoor big event, High output Osram 420W Bulb, beam angle 0 - 2.8°, 16 colors, 17 metal gobos. with 3 types of prisms. 10m - 780000 lux

Lamp type: Osram MSD 420w

Life time 2000 hours

Reflector: Lamp and reflector together in one unit

Color temp : 8000K

Beam angle: 0 - 2°

Lens: Glass optical 3 lens group

1 Fixed color wheel with 14 color filters + white

two-way rotating and rainbow effect

Sharp Beam 400



Model : R-MB400

Brand : ROYLITE

Lamp: Osram MSD 311w

Beam angle : 0 - 2.8°

Suitable for big event, High output Osram 311W Bulb, beam angle 0 - 2.8°, 13 colors, 17 metal gobos. with 3 types of prisms. 10m - 460000 lux

Lamp type: Osram MSD 311w bulb

lifespan 2500 hours

Color temp 8000K

Reflector: Lamp and reflector together in one unit

Lens : high precision optical lens,160mm diameter

Beam angle: 0 - 2.8°

13 color filters + white, color rainbow can be created

17 fixed metal gobos+white

Sharp Beam 300



Model : R-MB300

Brand : ROYLITE

Lamp : Osram MSD 251w

Beam angle : 0 - 2.8°

Osram MSD 251w bulb, beam angle 0 - 2.8°, equipped double prisms, 1pcs 16-facet circular prism, 1pcs 6-facet linear prism. 14 colors and 17 gobos. 10m - 420000 lux

Lamp type: Osram MSD 251w bulb

life time 4000 hours

Color temp : 8000K

Beam angle:0 - 2.8°

Lens: Glass optical 3 lens group, 152mm diameter

1 Fixed color wheel with 14 color filters + white

two-way rotating and rainbow effect

1 Gobo wheel with 17 gobos+white

LED Beam 200w



Model: R-LMB200

Brand : ROYLITE

LED : white 200w

Beam angle :0- 2.8°

This is a LED based Moving head beam light, 14 colors and 17 gobos, with 3 types of prisms, LED lifetime is 30000 hours.

Lamp type: High quality pro-moduled white LED 200w

lifespan 30000h

Color temp : 6500K

Beam angle: 0-2.8°,

Lens: Glass optical 3 lens group

1 Fixed color wheel with 14 color filters + white two-way rotating and rainbow effect

1 Gobo wheel with 17 gobos+white

1 rotating 8-facet prism with moving effect, 1 frost effect, dimming and strobe

LED Beam Spot Wash 250w



Model : R-BSW250

Brand : ROYLITE

LED : white 250w

Beam angle : 4 - 35°

This is a 250w LED Moving head, Beam spot wash 3 in 1, Beam angle : 4 - 35°, 9 color filters, 10 fixed gobos and 7 rotate gobos, 3 facets circular prism.

Lamp Type: Super bright 250w white LED

Lens: coated with anti-reflection film lens

Beam Angle: 4 - 35°

9 color filters + white light, color rainbow can be created, two colors move with gradient effect (linear movement),

color wheel bidirectional rotation, color at random mode

1 rotating gobo wheel with 4 glass + 3 metal gobos

LED Beam spot wash 500w



Model : R-BSW500

Brand : ROYLITE

LED Module : white 500w

Zoom , CMY , CTO

This is LED based beam spot wash 3 in 1 moving head, with a 500w white LED engine, Beam angle zooming 3.5° - 50°, with CMY + CTO color mix system.

Source: 500W White LED(6000K) , 21000 lm

Zoom: 3.5°- 50° linear zoom

Prism: 3-facet circular rotating prism

Frost: 1 frost filter

7 Color filters linear change

CMY+CTO variable color mixing for infinite color possibilities

1 static Gobo Wheel with 7 metal gobos plus open

1 rotating Gobo Wheel with 6 interchangeable glass gobos

LED Profile Moving Head 500w



Model: R-LPM500

Brand : ROYLITE

LED : white 500w

Framing,CMY,CTO,Zoom

this is a High brightness framing light, with Module LED 500w engine,beam angle zooming 6° - 48°,CMY + CTO Colormix system . 4 individual framing shutters/blades.

Light Source: 500W White LED, 20000 lm

Zoom: 6° - 48° linear motorized

Prism: 3-facet circular prism, and 6-linear prism

Dimmer: 0-100% variable linear dimming curves

CRI Filter: CRI > 90

Shutters: 4 independent framing shutters

7 Dichoric Colors plus open, Index / Bi-directional rotating rainbow effect

CMY + CTO Colormix system CT 2700K - 6500K

Without Gobo wheel

LED Beam Wash 12 x 40w



Model : R-LBW1240

Brand : ROYLITE

LED : 12 x 40w RGBW

Beam angle : 5 - 50°

this is a LED wash moving head with zoom,with 12pcs 40w RGBW 4 in 1 LEDs,beam angle zooming 5°-50°, each LED control separately.

12pcs 40w RGBW 4 in 1 LEDs

Average Life Span > 50,000 h

Beam Angle: 5° - 50°

Lens: High-quality PMMA optical lens

All-optical domain dimming, 65536 grade dimming accuracy

High light output, low glare

Fast strobe: 1-25Hz

LED Beam Wash 7 x 40w



Model: R-LBW740

Brand : ROYLITE

-LED : 7 x 40w RGBW

Beam angle : 5 - 50°

this is a LED wash moving head with zoom,with original 7pcs 40w RGBW 4 in 1 LEDs.beam angle zooming 5°-50°,each LED control separately.

7pcs 40w RGBW 4 in 1 LEDs

Average Life Span > 50,000 h

Beam Angle: 5° - 50°

Lens: High-quality PMMA optical lens

All-optical domain dimming, 65536 grade dimming accuracy

High light output, low glare

Control Channel: 8 /16 / 32 / 40 control channel models

LED Beam Wash 19 x 15w



Model : R-LBW19

Brand : ROYLITE

LED : 19x15w RGBW

Beam angle : 8 - 54°

high quality RGBW 4 in 1 LEDs, each LED total power 15w, 19pcs such LEDs separated as 3 circular pixels.Beam angle linear zooming from 8° -54° .give narrow beam wash and wide angle wash effect

19pcs 15w RGBW 4 in 1 LEDs

Average life span N 50,000 h

Beam Angle: 8° - 54° linear zooming

Lens: High-quality optical lens

All-optical domain dimming

High light output, low glare

Fast Strobe: 1-25HZ

Control Channel: 20CH / 37CH control channel model

LED Beam Wash 37 x 15w



Model : R-LBW37

Brand : ROYLITE

LED : 37x15w RGBW

Beam angle : 8 - 45°

high quality RGBW 4 in 1 LED 15w, 37pcs such LEDs separated as 10 pixels. Beam angle linear zooming 8°- 45°, give narrow beam and wide angle wash effect, Low noise fan cooling !

37pcs 15w RGBW 4 in 1 LEDs

Average life span \geq 50,000h

Beam Angle: 8° - 45° linear zooming

Lens: High-quality optical lens

All-optical domain dimming

Pan 540°, Tilt 270°

Control Channel: 24CH / 32CH control channel model

LED Moving Matrix 25 x 15w



Model : R-LMM25

Brand : ROYLITE

LED : 25x15w RGBW

Beam angle : 6°

this is a 5 x 5 LED moving matrix light, with 25pcs high power 15w RGBW 4 in 1 Cree LEDs, beam angle 6°, each LEDs control separately, pan tilt unlimited moving.

High quality LED 15w RGBW 4 in 1 25pcs

Average life span > 50,000h

LED Lens: 6°

0-100% brightness adjustment

Fast speed strobe 1-18/sec.

8 built-in programs

Control Channel: 19CH / 29CH / 117CH control channel model

LED Spin Eye 19 x 15w



Model : R-SE19

Brand : ROYLITE

LED : 19x15w RGBW

Beam angle : 4 - 60°

19pcs high quality RGBW 4 in 1 LED chip,each of them super powerful 15w,beam angle linear zooming 4° - 60°, and the lens rotationable to make more vivid effects, each LED control separately.

19pcs 15w RGBW 4 in 1 LEDs

Average Life Span>50,000 h

Beam Angle: 4° - 60°

Lens: High-quality PMMA optical lens, Lens rotation functional.

All-optical domain dimming, 65536 grade dimming accuracy

High light output, low glare

Fast strobe: 1-25Hz

Color macro and gradual color change effects

Control Channel: 21/23/35/78/97/99 control channels

LED Spin Eye 7 x 15w



Model: R-SE7

Brand : ROYLITE

LED : 7x15w RGBW

Beam angle : 4 - 60°

this is a mini eye moving head,with 7pcs 15w RGBW 4 in 1 LEDs,each LED control separately, beam angle zooming 4° -60°, and lens rotation.

7pcs 15w RGBW 4 in 1 LEDs

Average Life Span > 50,000 h

Beam Angle: 4° - 60°

Lens: High-quality PMMA optical lens, Lens rotation functional.

All-optical domain dimming, 65536 grade dimming accuracy

High light output, low glare

Fast strobe: 1 -25Hz

Color macro and gradual color change effects

Pan 540°, Tilt 240°

Control Channel: 8/ 16/32 /40 control channel models

LED Spin Eye 19 x 40w



Model : R-SE1940

Brand : ROYLITE

LED : 19x40w RGBW

Beam angle : 4 - 60°

19pcs high quality RGBW 4 in 1 LED chip,each of them super powerful 40w,beam angle linear zooming 4° - 60°, and the lens rotationable to make more vivid effects, each LED control separately.

19pcs 40w RGBW 4 in 1 LEDs

Average Life Span>30,000 h

Beam Angle: 4° - 60°

Lens: High-quality PMMA optical lens, Lens rotation functional.

All-optical domain dimming, 65536 grade dimming accuracy

High light output, low glare

Fast strobe: 1-25Hz

Color macro and gradual color change effects

Control Channel: 21/23/35/78/97/99 control channels

LED Spin Eye 7 x 40w



Model: R-SE740

Brand : ROYLITE

LED : 7x40w RGBW

Beam angle : 4 - 60°

this is a mini eye moving head,with 7pcs 40w RGBW 4 in 1 LEDs,each LED control separately, beam angle zooming 4° -60°, and lens rotation.

7pcs 40w RGBW 4 in 1 LEDs

Average Life Span > 30,000 h

Beam Angle: 4° - 60°

Lens: High-quality PMMA optical lens, Lens rotation functional.

All-optical domain dimming, 65536 grade dimming accuracy

High light output, low glare

Fast strobe: 1 -25Hz

Color macro and gradual color change effects

Pan 540°, Tilt 240°

Control Channel: 8/ 16/32 /40 control channel models

LED Moving Bar 5 x 60w



Mode : R-LMB560

Brand : ROYLITE

LED : 5x60w RGBW

Beam angle : 4-45°

Product description: high quality RGBW 4 in 1 LED 60w x 5pcs, and strobe LED 42x 3W White LED + 84x 0.3W RGB 3in1 .Beam angle linear zooming 4°- 45°,pan tilt 360 degree infinite rotating, Low noise fan cooling

Front: 5 x 60W RGBW 4in1 LED

Back :42x 3W White LED + 84x 0.3W RGB 3in1 LEDLED

Lens: 4 - 45°

RGBW color mixing

0-100% brightness adjustment

Fast speed strobe 1-18/sec.

pan tilt 360 degree infinite rotating

Control Channel: 29 / 105 control channel model

Lifting LED Ball



Mode : R-MLB

Brand : ROYLITE

Lifting wire : 3m / 6m

LED ball : 25cm / 35cm

Product description: No fan noise,very quiet engine with a kinetic LED color ball, lifting speed 0.6m / s, lifting height 3 meters or 6 meters optional.LED color ball diameters 25cm, or 35cm optional.

Light Source: 54pcs tricolor RGB SMD LEDs TOTAL 27W

RGB color mixing, LED ball diameter 25CM, 35CM optional

3-pin and 5-pin XLR connectors

Powercon In/Out for daisy-chain

Lifting wire 3 meters / 6 meters

Lifting speed 0.6 m/s

Load with cable Maximum 1.8 kgs

Machanical Safty control device

Mini LED Beam 36x3w



Mode : R-LMB108

Brand : ROYLITE

LED : 36x3w RGBW

Beam angle : 6°

Product description: This is a mini LED beam moving head light, with 36pcs 3w RGBW LEDs, beam angle 6°, pan tilt speed super fast. Low noise fan cooling !

36pcs 3w RGBW

Average life span $\geq 30,000$ h

LED Lens: 6°

RGBW color mixing

0-100% brightness adjustment

Fast speed strobe 1-18/sec.

8 built-in programs

Control Channel: 13 control channel model

LED Rotate Bar Zoom 12x40w



Model : R-LBZ1240

Brand : ROYLITE

LED : 12 x 40w RGBW

Beam angle : 5° - 45°

Tilt moving 260°, beam angle 5° - 45°, with 12pcs 40w RGBW 4 in 1 LEDs, each LED pixel control, special designed optics make it very bright beam & wash, Low noise fan cooling !

12pcs 40w LEDs, RGBW 4 in 1

Beam angle 5° - 45°

Life Span: $\geq 50,000$ h

Housing: Aluminum stretching material

Tilt motorized moving 0 - 260°

Powercon In/Out for daisy-chain

Protocol: DMX512

Channel Mode: 56ch

Control Mode: Pixel control

LED Rotate Bar Zoom 6x40w



Model : R-LBZ640

Brand : ROYLITE

LED : 6 x 40w RGBW

Beam angle : 5°- 45°

Tilt moving 260°, beam angle 5°- 45°, with 6pcs 40w RGBW 4 in 1 LEDs, each LED pixel control, special designed optics make it very bright beam&wash, Low noise fan cooling !

6pcs 40w LEDs, RGBW 4 in 1

Beam angle 5° - 45°

Life Span: ≥ 50,000 h

Tilt motorized moving 0 - 260°

3-pin and 5-pin XLR connectors in / out

Powercon In/Out for daisy-chain

Protocol: DMX512

Channel Mode: 30ch

Control Mode: Pixel control

LED Strobe / Wash 1000



Model : R-LSL1000

Brand : ROYLITE

LED : RGB / W / RGBW

960pcs SMD 0.5w

SMD5050 LED 960pcs 0.5w, beam angle 60°, 3 versions: RGB 3 in 1 version with 8 pixels control, White LED version with 4 pixels control, RGBW 4 in 1 version, with no pixel control. Low noise fan cooling !

Light Source

A : RGB 3 in 1 0.5W LED, 960pcs, 8 pixels control (default)

B : White color 0.5W LED, 960pcs, 4 pixels control

C : RGBW 4 IN 1 0.5W LED, 960pcs, no pixel control

Protocol: DMX512

Channel Mode: 8CH / 16CH / 52CH

Control Panel: LED display+ button

Strobe Speed: 0.5-25Hz/50 Hz Ac 0.6-30Hz/60 Hz Ac

LED Strip Strobe 480



Model : R-LSS480

Brand : ROYLITE

LED : RGB 3 in 1

480pcs SMD 0.5w

SMD5050 LED 480pcs 0.5w,beam angle 60°,RGB 3 in 1, with 80 pixels control.Low noise fan cooling !

RGB 3 in 1 0.5W LED, 480pcs, 80 pixels control

Life Span:≥50,000 h

Protocol: DMX512

Channel Mode: 3CH / 7CH / 240CH

Control Panel: LED display+ button

Strobe Speed: 0.5-25Hz/50 Hz Ac 0.6-30Hz/60 Hz Ac

LED Studio Par Color Wash



Model: R-LSP

Brand : ROYLITE

LED : 18x8w RGBW

Beam angle : 25°

this is a very quiet working LED par light,without fan cooling it cool by its own heavy aluminum body, Dimming is super smooth 16bits, flicker free for video.

A: 18 x 8w RGBW 4 in 1 LEDs, (Default)

B: 18 x 12w RGBWA+UV 6 in 1 LEDs

Average Life Span: >30,000h

Lens: 25° optional 45°

smooth linear dimmer

High light output, low glare

Fast speed strobe 1 ~25Hz

Color macro and gradual color change effects

Control channel: 8 control channel modes

LED Par Zoom 19 x 15w



Model : R-LPZ19

Brand : ROYLITE

LED : RGBW

Beam angle : 10° - 60°

This is a LED par light with zoom, 19pcs high power LEDs, RGBW 4 in 1 ,beam angle zooming 10° - 60°,Low noise fan cooling !

Lamp : 19 x 15w RGBW 4 in 1 LED

Average Life Span: > 50,000h

Lens: 10° - 60° linear zooming

RGBW 4 in 1

smooth linear dimmer

High light output, low glare

Fast speed strobe 1~25Hz

Color macro and gradual color change effects

Control channel: 18 control channels

LED Par Zoom 18 x 8w



Model : R-LPZ18

Brand : ROYLITE

LED :18 x 8w RGBW

beam angle : 10° - 60°

this is a LED color wash light with zoom,beam angle zooming 12° - 58°, with 18pcs 10w RGBW 4 in 1 LEDs.16 bits smooth dimming.Low noise fan cooling.

Lamp : 18 x 10w RGBW 4 in 1 LEDs

Average Life Span: > 30,000h

Lens: 12° - 58° linear zooming

smooth linear dimmer

High light output, low glare

Fast speed strobe 1 ~25Hz

Color macro and gradual color change effects

Control channel: 9 control channel modes

LED Par Light 18pcs



Model: R-LP18

Brand : ROYLITE

LED : 18 x 8w RGBW

Beam angle : 25°

This is a LED color wash light with high power 8w or more, Multi-chips LED. beam angle 25° or 40°,Low noise fan cooling

A: 18 x 8w RGBW 4 in 1 LEDs, (default)

B: 18 x 12w RGBWA+UV 6 in 1 LEDs

Average Life Span: > 30,000h

Lens: 25° optional 40°

smooth linear dimmer

High light output, low glare

Fast speed strobe 1 ~25Hz

Color macro and gradual color change effects

Control channel: 8 control channel modes

LED Par Light 24pcs



Model: R-LP24

Brand : ROYLITE

LED : 24 x 8w RGBW

Beam angle : 25°

This is a LED color wash light with high power 8w or more, Multi-chips LED. beam angle 25° or 40°,Low noise fan cooling

A: 24 x 8w RGBW 4 in 1 LEDs, (default)

B: 24 x 12w RGBWA+UV 6 in 1 LEDs

Average Life Span: > 30,000h

Lens: 25° optional 40°

smooth linear dimmer

High light output, low glare

Fast speed strobe 1 ~25Hz

Color macro and gradual color change effects

Control channel: 8 control channel modes

LED Par 36 x 8w



Model : R-LP360

Brand : ROYLITE

LED : 36 x 8w

Beam angle : 25° / 40°

this is a high power LED color wash with 36pcs high quality 8w RGBW LEDs,16bits smooth dimmer,and low noise fan cooling, lens 25°, 40° for options.Low noise fan cooling !

36 x 8w RGBW 4 IN 1 LEDs

Average Life Span: > 50,000h

Lens: 25° optional 40°

smooth linear dimmer

High light output, low glare

Fast speed strobe 1~25Hz

Color macro and gradual color change effects

Control channel: 8 control channel modes

Mini LED Par 7 x 8w



Model : R-LP7x8

Brand : ROYLITE

LED : 7 x 8w RGBW

Beam angle : 25°,40°

this is a Mini LED color wash with 7pcs 8w LEDs,RGBW 4 in 1, lens 25°, 40° for options.

7 x 8w RGBW 4 in 1 LEDs

Average Life Span: > 50,000h

Lens: 25° optional 40°

smooth linear dimmer

High light output, low glare

Fast speed strobe 1~25Hz

Color macro and gradual color change effects

Control channel: 8 control channel modes

COB Par Blinder 200w



Model: R-COB200

Brand : ROYLITE

LED : COB 200w

Beam angle : 60°

this is a warm white LED par, with one COB 3000K LED, power is 200w, beam angle 60°, warm white and cool white 2 in 1 LED for option. Low noise fan cooling !

LIGHT SOURCE

A - 200W COB LED, warm white , color temp 3000K

B - 200W COB LED, warm white and cool white 2 in 1

Life Span: 30000 h

Lens: 60°

Housing: Aluminum material

Structure: available for vertical/horizontal splicing

3-pin or 5-pin XLR connectors

AC: 100-240V 50/60 Hz

Input Power: 210W

COB Blinder With Zoom



Model: R-LBZ

Brand : ROYLITE

LED : 200w or 300w

Beam angle : 15 - 60°

This is a blinder light, 200w / 300w LED source warm white or cool white , beam angle zooming 15° - 60°. Low noise fan cooling !

Lamp : 200w or 300w white LED. warm white or cool white

Average Life Span: > 30,000h

Lens: 15° - 60° linear zooming

High light output, low glare

Fast speed strobe 1 ~ 25Hz

Color macro and gradual color change effects

Control channel: 8 control channel modes

Protocol: Standard DMX512

Menu display: LED display

Warm COB Blinder 2 x 100w



Model : R-COB2E

Brand : ROYLITE

LED : 2 x 100w

Beam angle : 60°

this is a warm white 2 eyes LED blinder, with 2pcs COB 3200K LED, each LED 100w,beam angle 60° , optional version cool white LEDs.Low noise fan cooling !

A - 2 x 100W COB LED, warm white , color temp 3200K

B - 2 x 100W COB LED, cool white ,color temp 6400K

Life Span: ≥ 30,000 h

Lens: 60°

Housing: Aluminum material

Structure: available for vertical/horizontal splicing

AC: 100-240V 50/60 Hz

Input Power: 210W

Protocol: DMX512

Channel Mode: 5CH,3CH

Warm COB Blinder 4 x 100w



Model : R-WB4

Brand : ROYLITE

LED : 4 x 100w

Beam angle : 60°

this is a high power blinder light with 4pcs warm white LEDs,each 100w total 400w, color temp 3200K.each LED control separately.Low noise fan cooling !

4pcs x 100W COB LEDs,color temp 3200K,warm white

optional version cool white 6400K LEDs.

Life Span: ≥ 30,000 h

Lens: 60°

3-pin or 5-pin XLR connectors

Powercon In/Out for daisy-chain

Channel Mode: 1CH,3CH,4CH,9CH

Control Mode: Pixel control

Warm COB Blinder 4 x 50w



Model : R-COB450

Brand : ROYLITE

LED : 4 x 50w

Beam angle : 60°

this is a warm white LED blinder, with 4pcs COB 3200K LED, each LED 50w, beam angle 60° , optional version cool white LEDs. Low noise fan cooling !

A: COB LED 4 x 50w warm white 3200K (Default)

B: COB LED 4 x 50w cool white 5600K

C: COB LED 2 x 50w warm white 3200K , 2 x 50w cool white 5600K

Life Span: ≥ 30,000 h

Lens: 60°

Housing: Aluminum material

Structure: available for vertical/horizontal splicing

AC: 100-240V 50/60 Hz

Input Power: 210W

Protocol: DMX512

Channel Mode: 8CH,6CH

LED Blinder 5



Model : R-LB5

Brand : ROYLITE

LED : 5pcs 30w RGB

Beam angle : 58°

This is a pixel blinder bar light, with 5pcs 30w RGB 3 in 1 LEDs, beam angle 58° , each LED control separately

5x30w RGB 3 in 1

Life Span: > 30,000 h

Lens: 58°

Housing: Aluminum stretching material

3-pin or 5-pin XLR connectors

Powercon In out

AC: 100-240V 50/60 Hz

Input Power: 160W

LED Blinder 5x5



Model : R-LB5x5

Brand : ROYLITE

LED : 25x10w RGBW

Beam angle : 58°

this is a pixel mapping LED blinder, with 25pcs high power 10w RGBW 4 in 1 LEDs, each LED control separately, beam angle 58°

25pcs x 10W RGBW 4 in 1 LEDs

Life Span: 50,000 h

Lens: 58°

Housing: Aluminum stretching material

Structure: available for vertical/horizontal splicing

3-pin or 5-pin XLR connectors

Powercon In/Out for daisy-chain

LED Strip Light 18 x 8w



Model : R-LPW18

Brand : ROYLITE

LED : 18x8w RGBW

Beam angle : 25°

this is a pixel mapping LED strip, with 18pcs high power 10w RGBW 4 in 1 LEDs, each LED control separately. beam angle 15 °, 25 °, 45 ° for options. DMX channels models 8CH, 14CH, 26CH, 74CH. Low noise fan cooling !

18pcs x 8W RGBW 4 in 1 LEDs

Life Span: 50,000 h

Lens: 25°

Housing: Aluminum stretching material

Structure: available for vertical/horizontal splicing

3-pin or 5-pin XLR connectors

Powercon In/Out

LED battery Uplight



Model : R-LBU6

LED : 6 x 12w RGBWAUV

this is a LED battery Uplight,6pcs 12w RGBWA+UV 6 in 1 LEDs,beam angle 25° ,mobil APP, wireless DMX,remote,3 control ways, up to 8 hours working time.

6x 12w RGBWA+UV 6 in 1 LEDs

Average Life Span: >30,000h

Lens: 25° optional 45°

RGBWA+UV 6 in 1

smooth linear dimmer

High light output, low glare

Fast speed strobe 1 ~25Hz

Color macro and gradual color change effects

Brand : ROYLITE

App.Wireless DMX,remote

Battery LED Uplight 3pcs



Model : R-LBU3

LED : 3 x 12w RGBWAUV

this is a LED battery Uplight,3pcs 12w RGBWA+UV 6 in 1 LEDs,beam angle 25°,mobile APP, wireless DMX,remote,3 control ways, up to 8 hours working time.
3 x 12w RGBWA+UV 6 in 1 LEDs, Average Life Span: >30,000h

Lens: 25° optional 40°

Control channel: 6 / 10 control channel modes

WIFI control,mobile App,IOS or Andriod

Built in 2.4G wireless DMX receiver

Battery time display

Battery capacity 10000mah

Battery last time : full on 3 hours, colors running 6 hours, single color 8 hours
without Fan cooling,quiet working

Brand : ROYLITE

App,Wireless DMX,remote

Mini LED Profile Zoom 60w



Model : R-MPZ60

Brand : ROYLITE

LED : warm / cool white 60w

Beam angle : 15°-30°

mini compact body,Color temp 3200k or 6500k optional , super silent fan with copper liquid cooling,clear spot cut edge,high bright even spot,flicker free for Camera

single 60w LED, warm white 3200k, or cool white 6500k CRI: Ra≥90

Life Span: ≥ 50,000 h

Beam angle zoom: 15° - 30°

Housing: Die-casting aluminum

AC: 100-240V 50/60 Hz

Input Power: 60W

Protocol: DMX512,super smooth 16 bit dimming

Channel Mode: 1CH ,3CH

LED Profile Light 600w CTO



Model : R-P600

Brand : ROYLITE

LED : warm+cool white 600w

Beam angle : 19°/26°/36°/50°

Color temp 3000k - 6000k linearly controlled by one DMX channel, super silent fan with copper liquid cooling,clear spot cut edge,high bright even spot,flicker free for Camera

single 600w LED, warm white and cool white 2 in 1

Life Span: > 30,000 h

Lens: 19°/26°/36°/50°

Housing: Aluminum stretching material

3-pin or 5-pin XLR connectors, Powercon In out

AC: 100-240V 50/60 Hz

Input Power: 650W

LED Profile 300w Light



Model : R-P300

Brand : ROYLITE

LED : warm / cool white 300w

Beam angle : 19°/26°/36°/50°

Color temp 3000k or 6000k optional , super silent fan with copper liquid cooling,clear spot cut edge,high bright even spot,flicker free for Camera,

single 300w LED, warm white 3200K or cool white 5600K for options

Life Span: 30,000 h

Lens: 19°/26°/36°/50°

Housing: Aluminum stretching material

3-pin or 5-pin XLR connectors

Powercon In/Out for daisy-chain

AC: 100-240V 50/60 Hz

Input Power: 350W

LED Profile 200w Light



Model : R-P200

Brand : ROYLITE

LED : warm / cool white 200w

Beam angle : 19°/26°/36°/50°

Color temp 3000k or 6000k optional , super silent fan with copper liquid cooling,clear spot cut edge,high bright even spot,flicker free for Camera

single 200w LED, warm white 3200K or cool white 5600K for options

Life Span: 30,000 h

Lens: 19°/26°/36°/50°

Housing: Aluminum stretching material

3-pin or 5-pin XLR connectors

Powercon In/Out for daisy-chain

AC: 100-240V 50/60 Hz

Input Power: 250W

LED Profile Zoom 200w



-Model : R-PZ200

Brand : ROYLITE

-LED : warm / cool white 200w

zoom : 19° -36°

Color temp 3200k or 6500k optional , super silent fan with copper liquid cooling,clear spot cut edge,high bright even spot,flicker free for Camera

LIGHT SOURCE

single 200w LED, warm white 3200k, or cool white 6500k

CRI: Ra≥90

Life Span: ≥ 50,000 h

Beam angle zoom: 19° - 36°

FEATURES

Housing: Die-casting aluminum material

3-pin or 5-pin XLR connectors

ELECTRICAL

AC: 100-240V 50/60 Hz

Input Power: 230W

LED Fresnel 200w



Model : R-LF200

Brand : ROYLITE

LED : 200w

Beam angle : 19° or 26°

this is a LED fresnel light, with high quality single 200w LED, warm white or cool white for options. beam angle 19° or 26° , super smooth 16-bit dimming .CRI>90.

LIGHT SOURCE

single 200w LED, warm white 3200K or cool white 6500K for options

Life Span: ≥ 30,000 h

OPTICAL SYSTEM

Beam angle: 19° or 26°

FEATURES

Housing: Aluminum stretching material

3-pin or 5-pin XLR connectors

Powercon In / out

ELECTRICAL

AC: 100-240V 50/60 Hz

Input Power: 200W

LED Fresnel Zoom



-Model : R-LFZ

Brand : ROYLITE

-LED : 200w / 300w

zoom : 15° -50°

this is a LED fresnel light, with high quality single 200w / 300w LED, warm white or cool white for options, beam angle motorized zooming 15° - 50", super smooth 16-bit dimming .CRI>95.

LIGHT SOURCE

A : single 200w LED, warm white 3000K or cool white 5600K for options

B : single 300w LED, warm white 3000K or cool white 5600K for options

Life Span: > 30,000 h

Beam angle: 15° - 50° linear zooming

Housing: Aluminum stretching material

3-pin or 5-pin XLR connectors

LED Video Panel Light



Model : R-LVP

Brand : ROYLITE

LED : 150w

Warm white or cool white

this is a LED video panel light, with high quality White LED 384pcs, warm white 3200k or cool white 6500k for options. super smooth 16-bit dimming .CRI>90. without fan noise, flicker free for camera.

version A : SMD LEDs 384pcs warm white 3200K

version B : SMD LEDs 384pcs cool white 6500K

Life Span: ≥ 50,000 h

Beam angle: 120°

Housing: Aluminum stretching material

3-pin or 5-pin XLR connectors, Powercon In / out

AC: 100-240V 50/60 Hz

Input Power: 160W

LED Follow Spot 460w



Model : R-LFS460

Brand : ROYLITE

LED : 420w

Shooting : 150m

LED 420w,6500K,CRI>90,shooting 150m,clear edge,even spot,5-colors color wheel,5-gobos gobo wheel, beam angle zooming 10° - 65° .

LIGHT SOURCE

LED 420W, 6500K, 3200K optional, CRI>90

Life Span: ≥ 30000 h

Beam angle: Linear 10° - 65°

FEATURES

Housing: aluminum and fireproofing quality plastic

Powercon In

ELECTRICAL

AC: 100-240V 50/60 Hz

Input Power: 460W

LED Wash / Strobe IP



Model : R-LSW

Brand : ROYLITE

LED : SMD5050 RGB

Beam angle : 68°

SMD5050 RGB LEDs, total LED power 320w, IP65 waterproof,gives super bright RGB color mixing wash and strobe effect.

Light Source: super bright RGB 3 colors in 1 SMD5050, LED total power 320w

Life Span:≥50,000 h

LED Control: 6 individual segments , separate control

Power Supply: 100-240V 50/60 Hz

Input Power: 320W

Protocol: DMX512

Channel Mode: 3CH / 7CH / 72CH

Control Panel: LED display+ button

Strobe Speed: 0.5-25Hz/50 Hz Ac 0.6-30Hz/60 Hz Ac

LED Wash / Flood Color 480



Model : R-LWC480

Brand : ROYLITE

LED : 48 x 8w RGBW

Beam angle : 25° / 40°

this is a LED outdoor washer with 48pcs high power 8w LEDs, each LED has RGBW 4 colors, beam angle 25°, IP65 waterproof.

Lamp: 48 x 10w RGBW 4 in 1 LEDs,

Average Life Span >50,000h

Lens: 25° , optional 40°

RGBW 4 in 1

256 grade 0-100% square rate dimmer

Fast speed strobe

Effect macro and white light gradient effect

Control channel: 8 control channel modes

LED Wash / Flood Color 600



Model : R-LWC600

Brand : ROYLITE

LED : 60 x 10w RGBW

Beam angle : 25° / 45°

this is a LED outdoor washer with 60pcs high power 10w LEDs, each LED has RGBW 4 colors, beam angle 25°, IP65 waterproof. with seetronic IP Powercon True 1 input and output. waterproof fan cooling.

Lamp: 60 x 10w RGBW 4 in 1 LEDs,

Average Life Span >50,000h

Lens: 25° , optional 45°

RGBW 4 in 1

256 grade 0-100% square rate dimmer

Fast speed strobe

Effect macro and white light gradient effect

Control channel: 8 control channel modes

LED Rotate Strobe 1000IP



Model : R-LRS1000

Brand : ROYLITE

LED power : 1000w

Tilt moving : 0 - 185°

Waterproof moving strobe light, LED tube with 144pcs 5w white LEDs,4 pixels separately.
LED panel with 480pcs 0.5w RGB 3 in 1 LEDs,8 pixels separately.True 1 connetor in and out.support RDM.

LED Type: 5050 0.5W RGB 3in1 LEDs 480pcs

LED Segments: 8 (2 x 4)

Strobe Tube LEDs

LED Type: 3535 5W 6500K LEDs 144pcs

LED Segments: 4

Tilt (Degrees): 185°

Control Modes: 7CH / 14CH / 42CH

Cooling: Temperature controlled, overheating protection

LED Rotate Washer 44IP



Model : R-LRW44

Brand : ROYLITE

LED : 44 x 10w RGBW

Tilt moving : 0 - 185°

Waterproof rotate LED washer, with 44pcs 10w RGBW 4 in 1 LEDs,beam angle 25° ,motorized tilt moving 0 - 185° ,True 1 input and output.support RDM.

Lamp: 44 x 10w RGBW 4 in 1 LEDs,

Average Life Span >50,000h

Lens: 25° , optional 45°

256 grade 0-100% square rate dimmer

Fast speed strobe

Effect macro and white light gradient effect

CONTROL AND PROGRAMMING

Control channel: 7CH,9CH,11CH

Protocol: Standard DMX512 , RDM

Tilt moving 0 - 185°

Master/Slave control mode

Menu Display: LCD display

DMX Signal Connection: 3-pin XLR input/output

Aluminum alloy die-casting structure

LED Par Zoom 15 x 15w IP



Model : R-WPZ15

Brand : ROYLITE

LED : 15x15w RGBW

Beam angle : 8° - 50°

this is a waterproof IP65 LED par light with zoom, beam angle zooming 8° - 50°, with 15pcs 15w RGBW 4 in 1 LEDs,16bits smooth dimming.

Lamp: 15 x 15w RGBW 4 in 1 LEDs

Average Life Span >50,000h

Lens: 8° - 50° linear zooming

256 grade 0-100% square rate dimmer

Fast speed strobe

Effect macro and white light gradient effect

Control channel: 11 control channels

LED Par Zoom 7 x 40w IP



Model : R-WPZ740

Brand : ROYLITE

LED : 7x40w RGBW

Beam angle : 6° - 50°

this is a waterproof IP65 LED par light with zoom, beam angle zooming 6° - 50°, with 7pcs 40w RGBW 4 in 1 LEDs,16bits smooth dimming,quiet waterproof fan cooling.

Lamp: 7 x 40w RGBW 4 in 1 LEDs

Average Life Span >50,000h

Lens: 6° - 50° linear zooming

256 grade 0-100% square rate dimmer

Fast speed strobe

Effect macro and white light gradient effect

Control channel: 11 control channels

LED Waterproof Par 18pcs



Model : R-WWP18

Brand : ROYLITE

LED : 18x8w RGBW

Beam angle : 25°

this is a waterproof LED color wash light .with 18pcs high power multi-chips LEDs,super well heat sink to assure long lifespan of the LEDs, beam angle 25° , 45° , for options.

LIGHT SOURCE

A: 18 x 8w RGBW 4 in 1 LEDs, (Default)

B: 18 x 12w RGBWA+UV 6 in 1 LEDs,

Average Life Span>30,000h

Lens: 25° , optional 45°

256 grade 0-100% square rate dimmer

Fast speed strobe

Effect macro and white light gradient effect

Control channel: 8 control channel modes

LED Waterproof Par 24pcs



Model : R-WWP24

Brand : ROYLITE

LED : 24 x 8w RGBW

Beam angle : 25° / 40°

with 24pcs high power RGBW LEDs,super well heat sink to assure long lifespan of the LEDs, smooth dimming,beam angle 25°,40° for options.true 1 connectors

24 x 8w RGBW 4 in 1 LEDs

Average Life Span>50,000h

Lens: 25° , optional 40°

256 grade 0-100% square rate dimmer

Fast speed strobe

Effect macro and white light gradient effect

Control channel: 8 / 4 control channel modes

Mini LED Waterproof Par 7pcs



Model : R-WWP7

LED : 7x8w RGBW

this is a mini LED waterproof par light, 7pcs LEDs RGBW or RGBWA+UV, super well heat sink to assure long lifespan of the LEDs, beam angle 25°, 40°, for options.silent operation.

A: 7 x 8w RGBW 4 IN 1 LEDs, (Default)

B: 7 x 12w RGBWA+UV 6 IN 1 LEDs

Average Life Span >50,000h

Lens: 25° , 40°

256 grade 0-100% square rate dimmer

Fast speed strobe

Effect macro and white light gradient effect

Control channel: 8 control channel

Brand : ROYLITE

Beam angle : 25°

COB Blinder 200w IP



Model : R-COB200IP

LED 200w: RGBW / WW

this is a waterproof blinder light, use single 200w LED, warm white or RGBW for options, beam angle 30° or 60° for options, IP65 waterproof.

A - 200W COB LED, warm white , color temp 3000K

B - 200W COB LED, RGBW

Life Span: 30,000 h

Lens: 30° / 60°

Housing: Aluminum material

Structure: available for vertical/horizontal splicing

3-pin or 5-pin XLR connectors,waterproof

Waterproof power cable in and out

AC: 100-240V 50/60 Hz

Input Power: 210W

Brand : ROYLITE

Angle : 30° / 60°

LED Strip 18 x 8w Waterproof



Model : R-PWW18

Brand : ROYLITE

LED : 18x8w RGBW

Beam angle : 25°

this is a Pixel mapping waterproof LED strip light, with 18 pcs 10w RGBW 4 in 1 LEDs, each LED control separately, beam angle 25 °, or 45 ° for option. IP65 waterproof. DMX channels 8CH, 14CH, 26CH, 74CH

Lamp: 18 x 8w RGBW 4 in 1 LEDs,

Average Life Span>30,000h

Lens: 25°

256 grade 0-100% square rate dimmer

Fast speed strobe

Effect macro and white light gradient effect

Control channel: 8, 14, 26, 38,74 control channel modes

Aluminum alloy die-casting structure

LED Strip 24 x 3w Waterproof



Model : R-LWW24

Brand : ROYLITE

LED : 24 x 3w RGB

Beam angle : 25°

this is a waterproof LED strip light, with 24pcs 3w RGB 3 in 1 LEDs, beam angle 25°, or 45° for option. IP65 waterproof. silent operation.

Lamp: 24 x 3w RGB 3 in 1 LEDs,

Average Life Span>50,000h

Lens: 25° 45°

256 grade 0-100% square rate dimmer

Fast speed strobe

Effect macro and white light gradient effect

Control channel: 8 control channels

Aluminum alloy die-casting structure

Warm COB Blinder 2 x 100w IP



Model : R-WB200IP

Brand : ROYLITE

LED : 2 x 100w

Beam angle : 30° / 60°

2pcs high power COB LEDs, warm white 3000K, 2 heads can manual adjust angle 0 - 24°, IP65 waterproof.

Light Source: 2pcs x 100W COB LEDs, warm white 3000K

Life Span: > 30,000 h

Housing: Aluminum stretching material

each head pan angle manual adjustable 0 - 24°

Structure: available for vertical/horizontal splicing

3-pin or 5-pin XLR connectors

Powercon In/Out for daisy-chain

Warm COB Blinder 4 x 100w IP



Model : R-WB4IP

Brand : ROYLITE

LED : 4 x 100w

Beam angle : 30° / 60°

this is a outdoor high power blinder light with 4pcs warm white LEDs.each 100w total 400w, color temp 3000K. each LED control separately, each head pan angle can be manual adjusted 0 - 24°.IP65 waterproof.

Light Source: 4pcs x 100W COB LEDs,

color temp 3000K warm white

Life Span: 30,000 h

Housing: Aluminum stretching material

each head pan angle manual adjustable 0 - 24°

Structure: available for vertical/horizontal splicing

LED Par Blinder 200w IP



Model : R-LWB200

Brand : ROYLITE

LED: 4 x 50w

Beam angle : 45°

this is a waterproof LED blinder light ,with 4pcs 50w white LEDs,warm white or cool white optional,super well heat sink to assure long lifespan of the LEDs, beam angle 45°.

A: COB LED 4 x 50w warm white 3200K (Default)

B: COB LED 4 x 50w cool white 5600K

C: COB LED 2 x 50w warm white 3200K ,2 x 50w cool white 5600K

Average Life Span>50,000h

Lens: 45°

Control channel: 6 control channel modes

IP65 waterproof

Battery LED Strip 9pcs IP



Model : R-BLS9

Brand : ROYLITE

LED 9 x 12w RGBWA+UV

App,Wireless DMX,remote

this is a LED battery Uplight for outdoor,9pcs 12w RGBWA+UV 6 in 1 LEDs,beam angle 25°,mobile APP, wireless DMX,remote,3 control ways, up to 3 hours working time at full power.

9 x 12w RGBWA+UV 6 in 1 LEDs

Lens: 25° optional 40°

Control channel: 6 / 10 control channel modes

WIFI control,mobile App,IOS or Andriod

Built in 2.4G wireless DMX receiver

Battery time display

Battery capacity 20000mah

Battery last time : full on 3 hours, colors running 5 hours, single color 7 hours

Battery LED Waterproof Par 6pcs



Model : R-BWL6

Brand : ROYLITE

LED 6 x 12w RGBWA+UV

App,Wireless DMX,remote

this is a LED battery Uplight for outdoor,6pcs 12w RGBWA+UV 6 in 1 LEDs,beam angle 25°,mobile APP, wireless DMX,remote,3 control ways, up to 8 hours working time.

6 x 12w RGBWA+UV 6 in 1 LEDs

Lens: 25° optional 40°

Control channel: 6 / 10 control channel modes

WIFI control,mobile App,IOS or Andriod

1.77inch LCD display

Built in 2.4G wireless DMX receiver

Battery time display

Battery capacity 20000mah

Battery last time : full on 3 hours, colors running 6 hours, single color 8 hours

Battery LED Waterproof Par 12pcs



Model : R-BWL12

Brand : ROYLITE

LED 12 x 12w RGBWA+UV

App,Wireless DMX,remote

this is a LED battery Uplight for outdoor,12pcs 12w RGBWA+UV 6 in 1 LEDs,beam angle 25°,mobile APP, wireless DMX,remote,3 control ways, up to 3 hours working time at full power.

12 x 12w RGBWA+UV 6 in 1 LEDs

Lens: 25° optional 40°

Control channel: 6 / 10 control channel modes

WIFI control,mobile App,IOS or Andriod

Built in 2.4G wireless DMX receiver

Battery time display

Battery capacity 20000mah

Battery last time : full on 3 hours, colors running 5 hours, single color 7 hours

Sunny 512 DMX Console



Mode : R-DC512

Brand : ROYLITE

Channels : 512 CH

DMX output : 2

the sunny 512 DMX console has total 512 DMX channels, with 2 DMX outputs, separately optical isolated.

512 DMX channels with 2 optical isolated output.

32 units with 16 DMX channels each. LCD display.

16 channel faders, 1 chase speed fader, 2 modulation Wheel for 16 bit of Tilt / Pan.

48 chases, total 1600 steps. Each step contains its speed and cross time

48 scenes.

15 environment programs to output the combination, chases and manual output quickly.

8 chases, 48 scenes can be run simultaneously. At most 32 unit can be Manual operate.

Backup or restore with USB Flash drive.

DMX Splitter 8



Model : R-DS8

Brand : ROYLITE

this is a electric isolated DMX splitter, with 2 DMX inputs , 3pin or 5pin optional,, DMX signal outputs 8 ways .

Voltage: AC 90V-240V,50HZ/60HZ

Unit size: 482 x 147 x 44mm (19" Rack, 1U)

Unit weight: 3kgs

1-8 DMX signal splitter

DMX signal isolated electrically

XLR 3-pin, 5-pin connectors optional

LED indicators display output data fro each channel independently



Arena Console



Fader wing



Tiger Touch II



Command wing



Quartz



USB Interface
Software Suite 2

Haze Machine 2000w



Mode : R-HM2000

Power : 2000w

Product description: This is a strong power haze machine with new technology, Continuous output,3500Cu ft/min .

Power: 2000W

Pre-heating time: 90 seconds

Tank capacity: 2.5L

Controller: LCD display control and DMX control.

Oil shortage protection

Overheat protection

Can be placed vertically or horizontally

DMX channel: 2channels

Brand : ROYLITE

Control : DMX, remote

Spark Cold Fire Machine



Mode : R-FX600

Power : 600w

Product description: This is a Spark Cold Fire Machine,spark height 1m to 5m, remote control and DMX control.

Power: 600W

Voltage: AC110V-250V 50/60Hz

Heating time: 5 min

Sparkular spray height: 1m to 5m

Control mode: Remote Control,DMX512

Output volume can adjust

Brand : ROYLITE

Spark Height : 1m - 5m

Power Distributor (Customized)



Power Distributor 32A



Power Distributor 63A



Power Distributor 63A



Socapex Power Rack



Waterproof CEE Power Distribution



Power Distribution Cabinet



12CH DMX Dimmer Pack



6CH DMX Dimmer Pack



4CH DMX Dimmer Pack

Accessories



Aluminum Clamps



Aluminum Safety Cables



Waterproof Cable



19Pin Socapex fan out cable



Socapex Cable



Powercon cables



DMX cable 3pin / 5pin



Power & DMX 2 in 1 cable



8 ways DMX data looms



3p - 5p XLR adapter



Rain cover



XLR to RJ45 Adapter